

Intensifier System M- HC-010



Key features

- ▶ Pressure on demand
- ▶ Solenoid activated
- ▶ High Pressure - up to 700 bar (10,000 psi)
- ▶ Fast fill - system flows up to 100 l/ min
- ▶ Extended Service Life
- ▶ Robust Design
- ▶ Flexible Design– several boosters / intensification ratios

Description

The M- HC-010 In- line Intensifier System is designed to boost the hydraulic pressure from the pump to the workload. The system operates by solenoid activation. The operator is in full control of the system and can decide if a boosted pressure to the workload should be applied.

The system is dynamical by means of being able to provide flow at high pressure for intermittent use (< 10 min duty cycle).

A relief valve is installed to control the maximum allowable pressure that the system can output, and allowing the booster to go for a higher end pressure producing flow at the decided pressure.


Easy installation

The M- HC-010 is provided with four mounting holes for through bolt installation. The four connection ports are placed logically in pairs and in line of each other on the HIC block. All surfaces are electroplated for good protection and fine surface finish.

Typical Applications

Mobile attachments (Motors - Steering Systems - Cutters - Crushers - Shears), Off Highway Equipment, Injection Molding Machines and Hydraulic Presses. Applicable for machines with insufficient pump capacity to prevent machine stoppage when peak pressures occur.

Function diagram

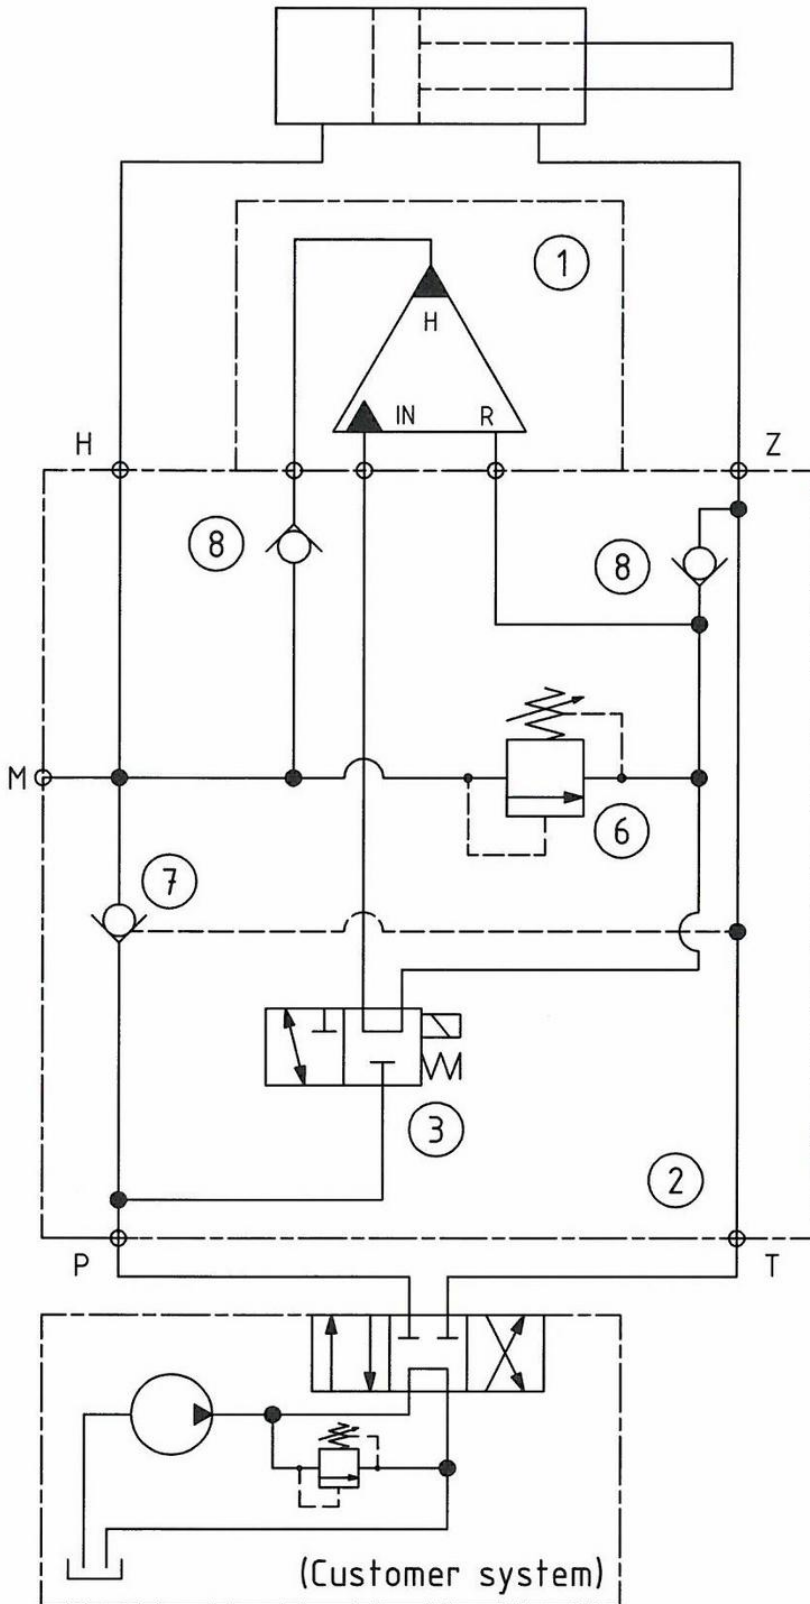

Port details:

P: Flow from pump.
A or B port on directional valve.

T: Flow to tank.
A or B port on directional valve.

H: High pressure port to cylinder.

Z: Low pressure port to cylinder.

M: Connection for manometer

1: miniBOOSTER: HC ___ - ___ - A - ___

2: Manifold

3: Directional Valve

6: Relief Valve
Set: ___ bar

7: Pilot Operated Check Valve

8: Check Valve

 Download PDF file: 010-01._Function_diagram

Connection types

Connection	IN / R	H
1	1/2" BSP	1/2" BSP
2	3/4-16" UNF	3/4-16" UNF
F	Flange mounting	HV-399-02. Detail drawing

Max. tightening torque BSP

	IN / R	H
	1/2" BSP	1/2" BSP
with steel washer	13.0 da/ Nm	13.0 da/ Nm
with aluminium washer	7.0 da/ Nm	–
with cutting edge	13.0 da/ Nm	13.0 da/ Nm

Max. tightening torque UNF

	IN / R	H
	3/4-16" UNF	3/4-16" UNF
with o- ring	3.5 da/ Nm	6.0 da/ Nm

Fluids and materials

Please see General Specifications

Ordering a M- HC-010

Type	Connection	Bypass flow	Max. pressure	Weight	Dimension drawing PDF
M- HC2D-010-1	Tube:	100 l/ min	350 bar	11,0 kg	M- HC2D-010-1
M- HC3-010-1	1 = BSP	100 l/ min	350 bar	9,5 kg	M- HC3-010-1
M- HC6D-010-1	2 = UNF	100 l/ min	350 bar	31,5 kg	M- HC6D-010-1
M- HC2D-010- F	F = Flange	55 l/ min	350 bar	9,0 kg	M- HC2D-010- F
M- HC3-010- F		55 l/ min	350 bar	7,5 kg	M- HC3-010- F
M- HC6D-010- F		100 l/ min	350 bar	31,0 kg	M- HC6D-010- F
M- HC2D-010-1K	Tube:	100 l/ min	500 bar	11,0 kg	M- HC2D-010-1K
M- HC3-010-1K	1 = BSP	100 l/ min	500 bar	9,5 kg	M- HC3-010-1K
M- HC6D-010-1K	2 = UNF	100 l/ min	500 bar	31,5 kg	M- HC6D-010-1K
M- HC2D-010- FK	F = Flange	55 l/ min	500 bar	9,0 kg	M- HC2D-010- FK
M- HC3-010- FK		55 l/ min	500 bar	7,5 kg	M- HC3-010- FK
M- HC6D-010- FK		100 l/ min	500 bar	31,0 kg	M- HC6D-010- FK
M- HC2D-010-1L	Tube:	55 l/ min	700 bar	11,0 kg	M- HC2D-010-1L
M- HC3-010-1L	1 = BSP	55 l/ min	700 bar	9,5 kg	M- HC3-010-1L
M- HC6D-010-1L	2 = UNF	55 l/ min	700 bar	31,5 kg	M- HC6D-010-1L
M- HC2D-010- FL	F = Flange	55 l/ min	700 bar	9,0 kg	M- HC2D-010- FL
M- HC3-010- FL		55 l/ min	700 bar	7,5 kg	M- HC3-010- FL
M- HC6D-010- FL		55 l/ min	700 bar	31,0 kg	M- HC6D-010- FL

Intensification factors

HC2D	HC3	HC6D
1,6	1,5	1,5
1,9	2,0	2,0
2,2	2,8	2,5
2,6	3,2	3,3
3,2	4,0	4,0
4,0	5,0	4,9
5,0	6,6	6,3
6,6	9,0	8,2
9,0		

The intensification factor depends on available inlet and desired outlet pressure. To calculate the initial factor, please use the following formular:

$i = \text{Desired high pressure} / \text{Pump pressure}$

Desired pressure: **500 bar**

Pump pressure: **200 bar**

$i = 500 / 200 = 2.5$

For static use: Please select an intensification factor higher or equal to the calculated value. In this case $i = 2.8$ with HC3 booster. The desired pressure of 500 bar is finally adjusted with the HP relief valve.

For dynamic use: Please select an intensification factor 60% higher than the calculated value. In this case $i = 500 / 200 = 2.5 + 60\% = 4.0$
The desired pressure of 500 bar is finally adjusted with the HP relief valve.

Ordering example:

Ordering example of a M- HC_-010- _ for 500 bar, connection tube BSP with $i = 2.8$;

M- HC3-010-1K mounted with HC3-2.8- A- D Please also specify valve pre settings, see [M010-01._Function_diagram](#)