

Intensifier System M- HC-011



Key features

- ▶ Automatic activated (sequence valve)
- ▶ High Pressure – up to 700 bar (10,000 psi)
- ▶ Fast fill – system flows up to 100 l/ min
- ▶ Extended Service Life
- ▶ Robust Design
- ▶ Flexible Design– several boosters / intensification ratios
- ▶ Switch from by- pass to intensified flow

Description

The M- HC-011 In- line Intensifier System is designed to boost the hydraulic pressure from the pump to the workload. It operates when and only when needed, for the sake of saving energy.

The system is dynamical by means of being able to provide flow **at** high pressure for intermittent use (< 10 min duty cycle).

The function of the system is simple, but smart. The hydraulic oil is by- passed directly from the pump to the workload at maximum flow when back pressure from the workload has reached a set point close to the maximum pressure of pump.

A sequence valve opens and directs the oil to the booster, which rises the pressure. The shift between maximum pump pressure and high pressure happens without intervention from the user and ensures that the workload at all time will be driven at a maximum speed in relation to the high pressure needed

A relief valve is installed to valve control the maximum allowable pressure that the system can output, and allowing the booster to go for a higher end pressure producing flow at the decided pressure.


Easy installation

The M- HC-011 is provided with four mounting holes for through bolt installation. The four connection ports are placed logically in pairs and in line of each other on the HIC block. All surfaces are electroplated for good protection and fine surface finish.

Typical Applications

Mobile attachments (Motors - Steering Systems - Cutters - Crushers - Shears), Off Highway Equipment, Injection Molding Machines and Hydraulic Presses. Applicable for machines with insufficient pump capacity to prevent machine stoppage when peak pressures occur.

Function diagram

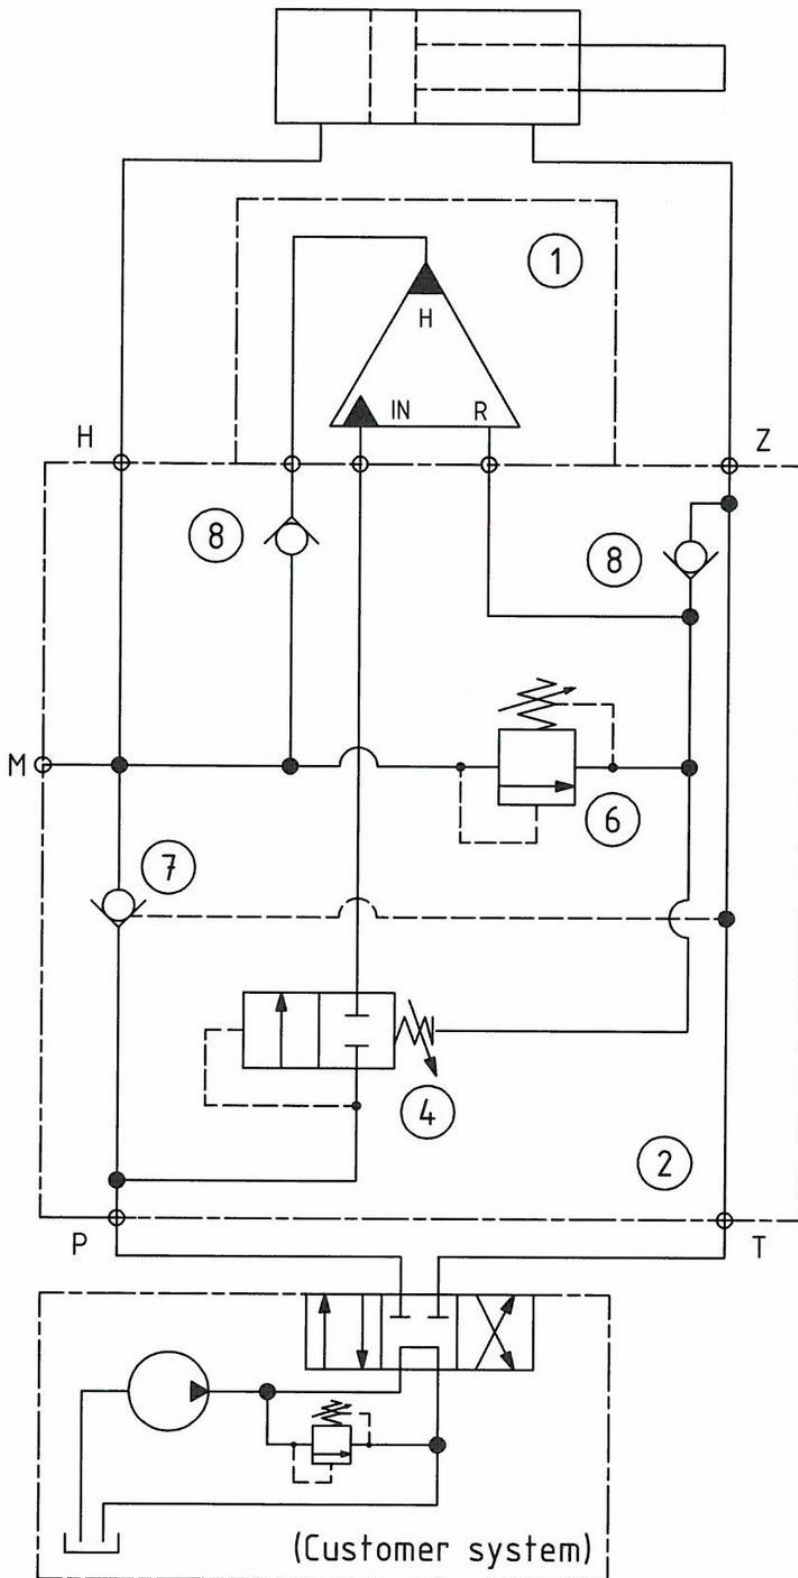

Port details:

P: Flow from pump.
A or B port on directional valve.

T: Flow to tank.
A or B port on directional valve.

H: High pressure port to cylinder.

Z: Low pressure port to cylinder.

M: Connection for manometer.

1: miniBOOSTER: HC ___ - ___ - A - ___

2: Manifold

4: Sequence Valve
Set: ___ bar

6: Relief Valve
Set: ___ bar

7: Pilot Operated Check Valve

8: Check Valve

 Download PDF file: [011-02._Function_diagram](#)

Connection types

| Connection | IN / R | H |
|------------|-----------------|---------------------------|
| 1 | 1/2" BSP | 1/2" BSP |
| 2 | 3/4-16" UNF | 3/4-16" UNF |
| F | Flange mounting | HV-399-02. Detail drawing |

Max. tightening torque BSP

| | IN / R | H |
|-----------------------|-------------|-------------|
| | 1/2" BSP | 1/2" BSP |
| with steel washer | 13.0 da/ Nm | 13.0 da/ Nm |
| with aluminium washer | 7.0 da/ Nm | – |
| with cutting edge | 13.0 da/ Nm | 13.0 da/ Nm |

Max. tightening torque UNF

| | IN / R | H |
|--------------|-------------|-------------|
| | 3/4-16" UNF | 3/4-16" UNF |
| with o- ring | 3.5 da/ Nm | 6.0 da/ Nm |

Fluids and materials

Please see General Specifications

Ordering a M- HC-011

| Type | Connection | Bypass flow | Max. pressure | Weight | Dimension drawing PDF |
|-----------------|------------|-------------|---------------|---------|-----------------------|
| M- HC2D-011-1 | Tube: | 100 l/ min | 350 bar | 11,0 kg | M- HC2D-011-1 |
| M- HC3-011-1 | 1 = BSP | 100 l/ min | 350 bar | 9,5 kg | M- HC3-011-1 |
| M- HC6D-011-1 | 2 = UNF | 100 l/ min | 350 bar | 31,5 kg | M- HC6D-011-1 |
| M- HC2D-011- F | F = Flange | 55 l/ min | 350 bar | 9,0 kg | M- HC2D-011- F |
| M- HC3-011- F | | 55 l/ min | 350 bar | 7,5 kg | M- HC3-011- F |
| M- HC6D-011- F | | 100 l/ min | 350 bar | 31,0 kg | M- HC6D-011- F |
| M- HC2D-011-1K | Tube: | 100 l/ min | 500 bar | 11,0 kg | M- HC2D-011-1K |
| M- HC3-011-1K | 1 = BSP | 100 l/ min | 500 bar | 9,5 kg | M- HC3-011-1K |
| M- HC6D-011-1K | 2 = UNF | 100 l/ min | 500 bar | 31,5 kg | M- HC6D-011-1K |
| M- HC2D-011- FK | F = Flange | 55 l/ min | 500 bar | 9,0 kg | M- HC2D-011- FK |
| M- HC3-011- FK | | 55 l/ min | 500 bar | 7,5 kg | M- HC3-011- FK |
| M- HC6D-011- FK | | 100 l/ min | 500 bar | 31,0 kg | M- HC6D-011- FK |
| M- HC2D-011-1L | Tube: | 55 l/ min | 700 bar | 11,0 kg | M- HC2D-011-1L |
| M- HC3-011-1L | 1 = BSP | 55 l/ min | 700 bar | 9,5 kg | M- HC3-011-1L |
| M- HC6D-011-1L | 2 = UNF | 55 l/ min | 700 bar | 31,5 kg | M- HC6D-011-1L |
| M- HC2D-011- FL | F = Flange | 55 l/ min | 700 bar | 9,0 kg | M- HC2D-011- FL |
| M- HC3-011- FL | | 55 l/ min | 700 bar | 7,5 kg | M- HC3-011- FL |
| M- HC6D-011- FL | | 55 l/ min | 700 bar | 31,0 kg | M- HC6D-011- FL |

Intensification factors

| HC2D | HC3 | HC6D |
|------|-----|------|
| 1,6 | 1,5 | 1,5 |
| 1,9 | 2,0 | 2,0 |
| 2,2 | 2,8 | 2,5 |
| 2,6 | 3,2 | 3,3 |
| 3,2 | 4,0 | 4,0 |
| 4,0 | 5,0 | 4,9 |
| 5,0 | 6,6 | 6,3 |
| 6,6 | 9,0 | 8,2 |
| 9,0 | | |

The intensification factor depends on available inlet and desired outlet pressure. To calculate the initial factor, please use the following formular:

$i = \text{Desired high pressure} / \text{Pump pressure}$

Desired pressure: **500 bar**

Pump pressure: **200 bar**

$i = 500 / 200 = 2.5$

For static use: Please select an intensification factor higher or equal to the calculated value. In this case $i = 2.8$ with HC3 booster. The desired pressure of 500 bar is finally adjusted with the HP relief valve.

For dynamic use: Please select an intensification factor 60% higher than the calculated value. In this case $i = 500 / 200 = 2.5 + 60\% = 4.0$
The desired pressure of 500 bar is finally adjusted with the HP relief valve.

Ordering example:

Ordering example of a M- HC-011- _ for 500 bar, connection tube BSP with $i = 2.8$;

M- HC3-011-1K mounted with HC3-2.8- A- D Please also specify valve pre settings, see [M-011-02._Function_diagram](#)